

# IECC Code Compliant Triple Dome

## Is Your Skylight up to Code?

Wasco's NEW triple dome glazing combinations meets the 2018 IECC Prescriptive Fenestration Requirements and are certified by the NFRC.


- Option 1: SatinSky2 / Clear / Clear – Meets Climate Zones 4–8.
- Option 2: SatinSky2 / Clear / Satinice – Meets ALL Climate Zones.

The Satinice material also has revolutionary advanced diffusing capabilities to provide better light spread for more floor coverage.

To be NFRC certified, manufacturers need to be listed on the NFRC site with tests results, and each unit skylight must display a NFRC label. If they are not listed on the site, they are not NFRC certified.

Search the NFRC site:

<http://search.nfrc.org/search/SearchOption.aspx?type=S>

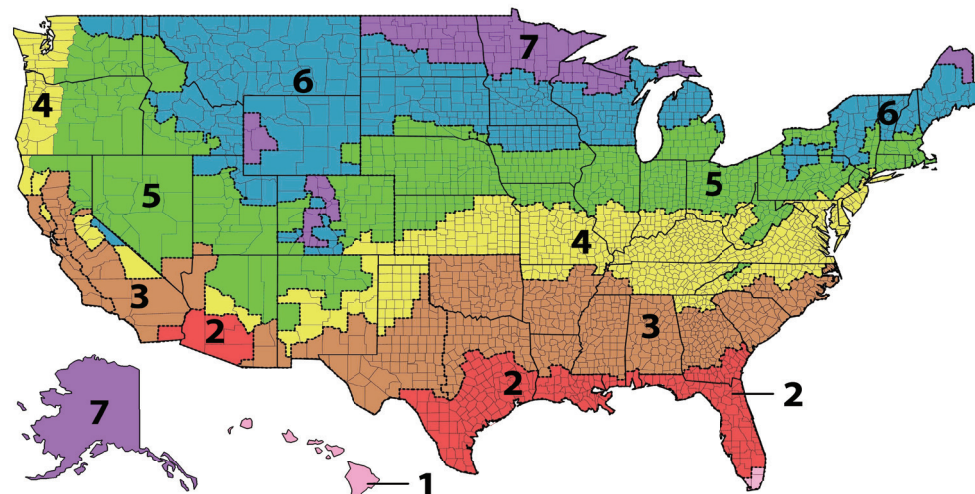

## IECC Prescriptive Fenestration Requirements



	Zone 1		Zone 2		Zone 3		Zones 4 & 5		Zone 6		Zones 7 & 8	
IECC Edition	U-Factor	SHGC	U-Factor	SHGC	U-Factor	SHGC	U-Factor	SHGC	U-Factor	SHGC	U-Factor	SHGC
2018	0.75	0.35	0.65	0.35	0.55	0.35	0.50	0.40	0.50	0.40	0.50	NR
2015	0.75	0.35	0.65	0.35	0.55	0.35	0.50	0.40	0.50	0.40	0.50	NR
2012	0.75	0.35	0.65	0.35	0.55	0.35	0.50	0.40	0.50	0.40	0.50	NR
2009	0.75	0.35	0.75	0.35	0.65	0.35	0.60	0.40	0.60	0.40	0.60	NR
2006	1.60	0.40	1.05	0.40	0.90	0.40	0.60	0.40	0.60	0.40	0.60	NR
<b>Curb Mount (DDDSS2) SatinSky2/Clear/Clear</b>							0.46	0.37	0.46	0.37	0.46	0.37
<b>Curb Mount (DDDSS2) SatinSky2/Clear/Satinice</b>	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35
<b>Deck Mount (DDDSA2) SatinSky2/Clear/Clear</b>							0.50	0.37	0.50	0.37	0.50	0.37
<b>Deck Mount (DDDSA2) SatinSky2/Clear/Satinice</b>	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35	0.46	0.35



Skylights pose an inherent risk of injury or death from fall throughs, and the safety of others is of the utmost importance to VELUX. VELUX recommends that the customer, building owner or manager use additional protection with the skylight such as an exterior or interior safety cage, to enhance long-term safety. The building owner or manager is responsible for providing fall protection around the skylight in accordance with OSHA regulations. VELUX also recommends that the building owner or manager restrict roof access only to personnel who have been cautioned as to the location of the skylights, and warned not to sit, step or walk on the skylights.

### VELUX America LLC

VELUX Wells • 85 Spencer Drive, Unit A • Wells, ME 04090  
Tel 1-800-688-3589 • [wascoskylights.com](http://wascoskylights.com) • [veluxusa.com](http://veluxusa.com)

V4602-0219  
©2019 VELUX Group

\*VELUX, VELUX logo, \*Wasco are registered trademarks