


IMPORTANT !!! THIS AREA MUST BE KEPT CLEAR OF ALL FLASHINGS, SEALANTS & ROOFING MATERIALS SO SKYLIGHT WILL WEEP PROPERLY (TYPICAL ALL SIDES)

12" CURB HEIGHT
16" CURB HEIGHT

ROUGH OPENING DIMENSION

4 1/2"

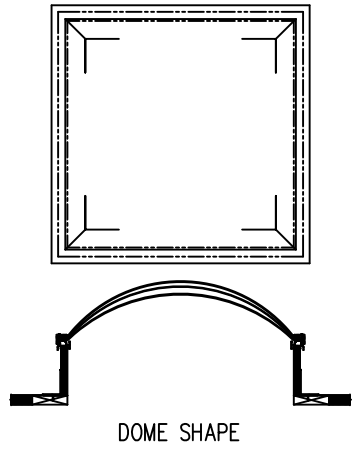

ORDER #: _____ DATE: _____

PROJECT: _____

LOCATION: _____

CUSTOMER: _____

APPROVED: _____ DATE: _____

MODEL	R.O. OF CURB	QUANTITY
2828	22 1/4" X 22 1/4"	
2852	22 1/4" X 46 1/4"	
3636	30 1/4" X 30 1/4"	
3652	30 1/4" X 46 1/4"	
4242	37" X 37"	
5252	46 1/4" X 46 1/4"	
5276	46 1/4" X 69 1/2"	
5296	46 1/4" X 89 1/2"	
5555	48" X 48"	
55102	48" X 96"	
6060	55" X 55"	
6666	60" X 60"	
66102	60" X 96"	
6476	57 1/2" X 69 1/2"	
6496	57 1/2" X 89 1/2"	
CUSTOM		

INTERIOR FRAME FINISH: WHITE PVC
RETAINER FINISH: MILL (STANDARD)

OTHER _____

CURB WALLS: WHITE INNER / MILL OUTER (STANDARD)

OTHER: INNER _____
OUTER _____

GLAZING:

ACRYLIC OUTER	ACRYLIC MIDDLE	ACRYLIC INNER
SATIN SKY 2	CLEAR	SATIN ICE 853

NFRC CERTIFIED PERFORMANCE
U-FACTOR 0.50 / SHGC 0.36 / VT 46%

SATIN SKY 2	CLEAR	CLEAR
-------------	-------	-------

NFRC CERTIFIED PERFORMANCE
U-FACTOR 0.50 / SHGC 0.37 / VT 49%

CWD3-NFRC CERTIFIED-TRIPLE DOME-DECK MOUNT

Wasco Part of **VELUX Commercial**

VELUX Wells
85 Spencer Dr, Unit A
Wells, ME 04090
1-800-88-VELUX
veluxusa.com



Skylights pose an inherent risk of injury or death from fall throughs, and the safety of others is of the utmost importance to VELUX. VELUX recommends that the customer, building owner or manager use additional protection with the skylight such as an exterior or interior safety cage, to enhance long-term safety. The building owner or manager is responsible for providing fall protection around the skylight in accordance with OSHA regulations. VELUX also recommends that the building owner or manager restrict roof access only to personnel who have been cautioned as to the location of the skylights, and warned not to sit, step or walk on the skylights.