

Notice: This is a reproduction of a Wasco Products drawing and is supplied only for an authorized job. This drawing must not be used for construction or fabrication until signed as checked and issued for construction.




SAFETY CONSIDERATIONS: WASCO SKYLIGHTS ARE DESIGNED TO WITHSTAND NORMAL ELEMENTS OF THE WEATHER. THEY ARE NOT DESIGNED TO WITHSTAND HUMAN IMPACT OR FALLING OBJECTS. THESE SKYLIGHTS SHOULD NOT BE WALKED UPON UNDER ANY CIRCUMSTANCES. THE OWNER OR DESIGNER SHOULD RESTRICT ACCESS ONLY TO AUTHORIZED PERSONNEL WHO HAVE BEEN ADEQUATELY CAUTIONED AS TO THE LOCATION OF THE SKYLIGHTS AND INFORMED OF THE WARNING ABOVE, OR SAID OWNER SHOULD PROVIDE PROTECTIVE GUARD RAILS OR SCREENS AROUND THE SKYLIGHT.

- Step 1.) Check curb(s) for proper dimension (O. D. Curb), square, flat and plumb. Also check curb(s) to make sure they are properly flashed into the roofing system.
- Step 2.) Apply bed of mastic (compatible with roofing material) to top of curb(s). Mastic is to be furnished by the installer.
- Step 3.) Remove unit(s) from box or crate and install on curb. Center unit on curb leaving a 5/8" flashing space around perimeter. **CAUTION:** Do not remove units and lay flat on roof. Heat build up could deform domes.
- Step 4.) Install 8d stainless steel or galvanized nails (or equivalent size screw) in pre-drilled holes. Approximately 9 to 12 inches on center. Note: If anchors are going into pressure treated wood, stainless steel anchors are required.
- Step 5.) Installation is complete. Read Care and Maintenance information for proper care of your new Wasco Products, Inc. unit skylights.

Installation Instructions for Curb Mount Unit Skylights



Installation Instructions for Curb Mount Unit Skylights



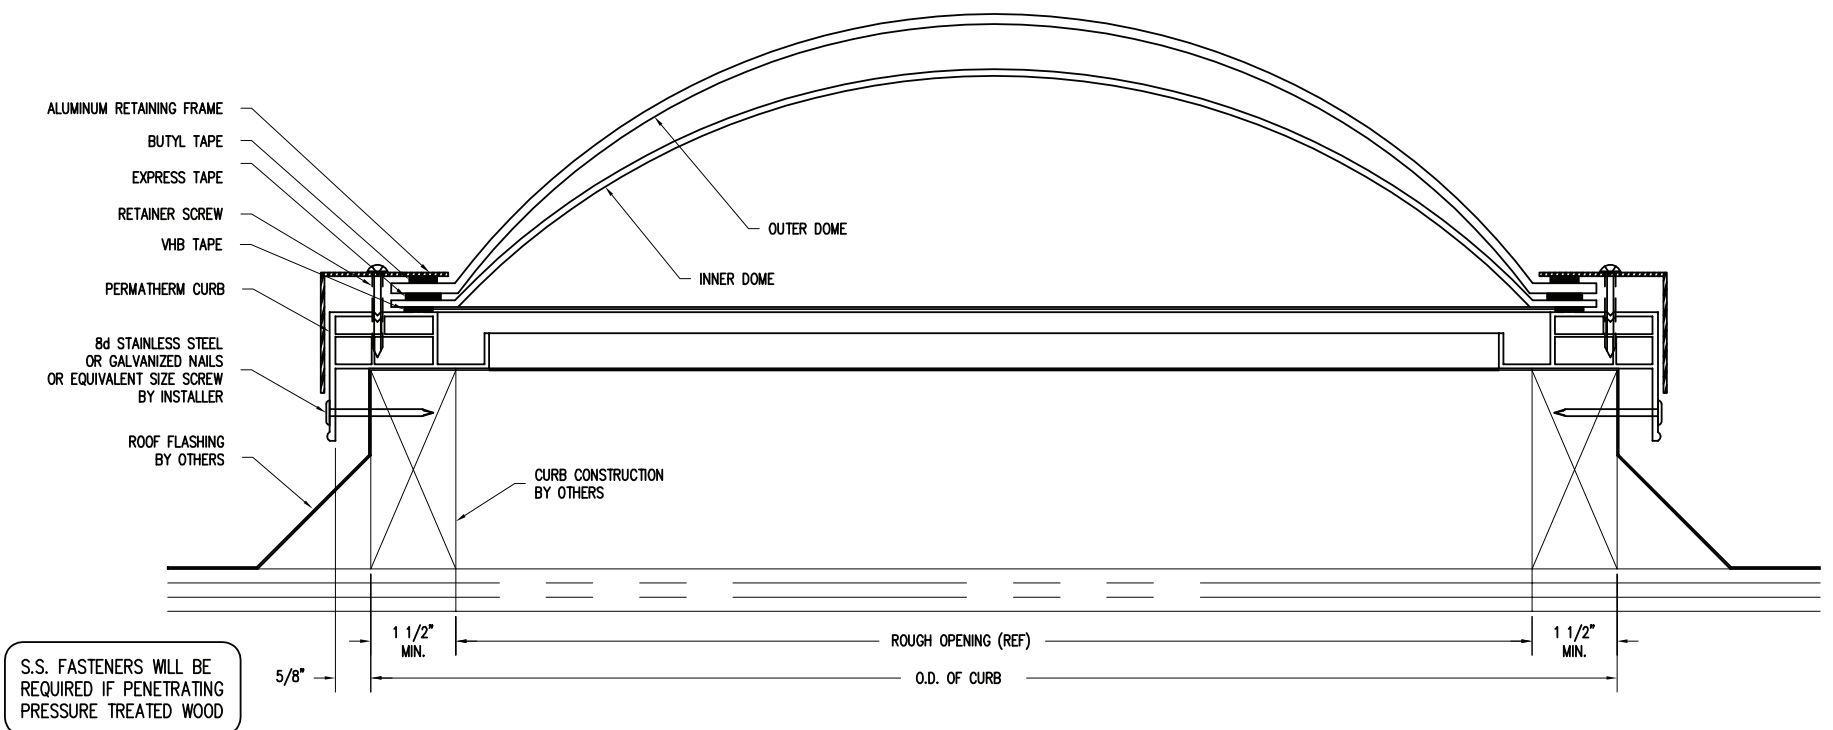


COMPLETED INSTALLATION



SAFETY CONSIDERATIONS: WASCO SKYLIGHTS ARE DESIGNED TO WITHSTAND NORMAL ELEMENTS OF THE WEATHER. THEY ARE NOT DESIGNED TO WITHSTAND HUMAN IMPACT OR FALLING OBJECTS. THESE SKYLIGHTS SHOULD NOT BE WALKED UPON UNDER ANY CIRCUMSTANCES. THE OWNER OR DESIGNER SHOULD RESTRICT ACCESS ONLY TO AUTHORIZED PERSONNEL WHO HAVE BEEN ADEQUATELY CAUTIONED AS TO THE LOCATION OF THE SKYLIGHTS AND INFORMED OF THE WARNING ABOVE, OR SAID OWNER SHOULD PROVIDE PROTECTIVE GUARD RAILS OR SCREENS AROUND THE SKYLIGHT.

Notice: This is a reproduction of a Wasco Products drawing and is supplied only for an authorized job. This drawing must not be used for construction or fabrication until signed as checked and issued for construction.

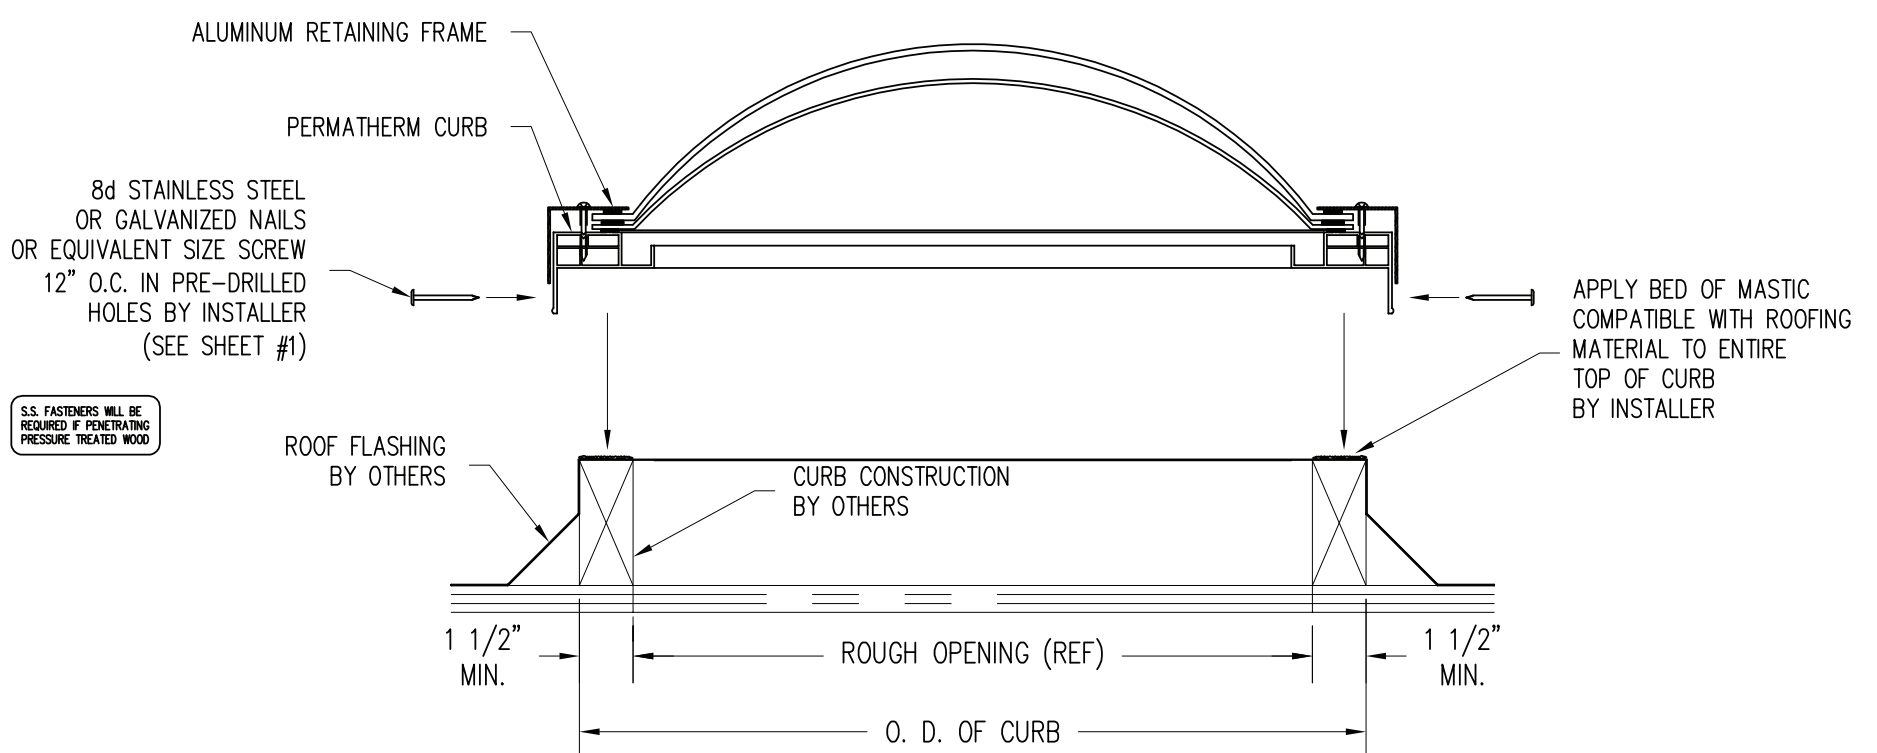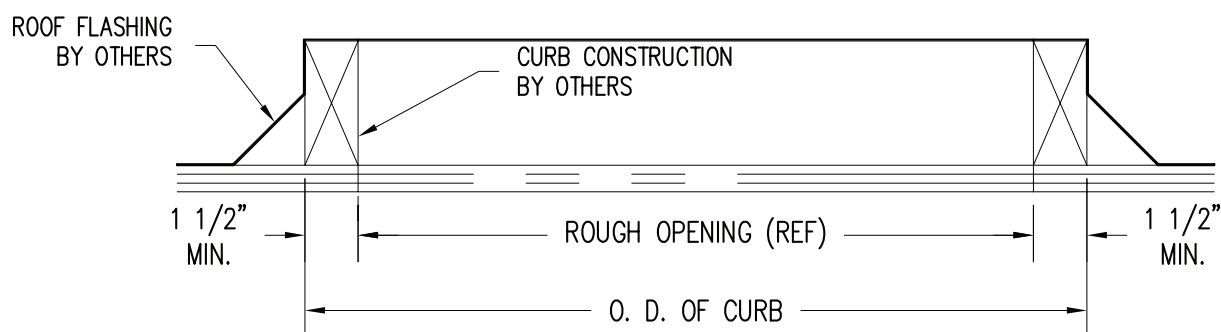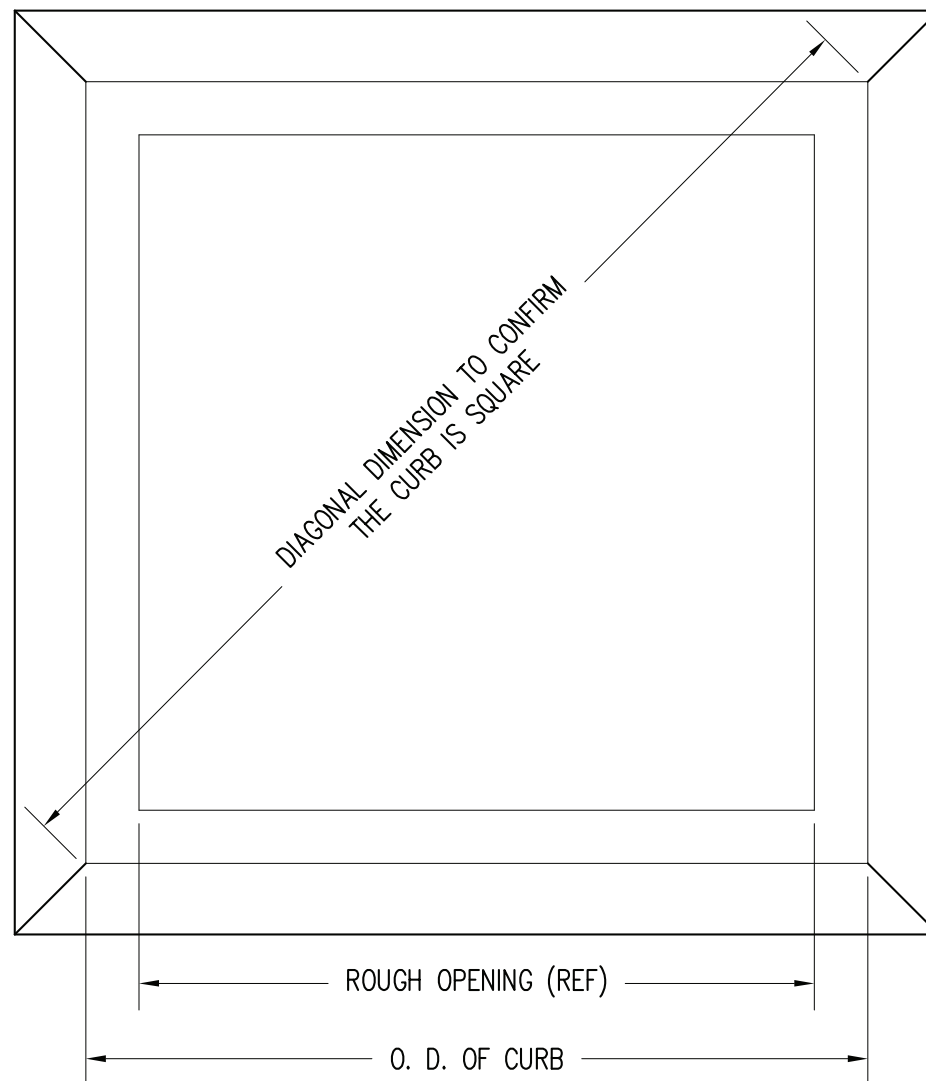

S.S. FASTENERS WILL BE REQUIRED IF PENETRATING PRESSURE TREATED WOOD



SAFETY CONSIDERATIONS: WASCO SKYLIGHTS ARE DESIGNED TO WITHSTAND NORMAL ELEMENTS OF THE WEATHER. THEY ARE NOT DESIGNED TO WITHSTAND HUMAN IMPACT OR FALLING OBJECTS. THESE SKYLIGHTS SHOULD NOT BE WALKED UPON UNDER ANY CIRCUMSTANCES. THE OWNER OR DESIGNER SHOULD RESTRICT ACCESS ONLY TO AUTHORIZED PERSONNEL WHO HAVE BEEN ADEQUATELY CAUTIONED AS TO THE LOCATION OF THE SKYLIGHTS AND INFORMED OF THE WARNING ABOVE, OR SAID OWNER SHOULD PROVIDE PROTECTIVE GUARD RAILS OR SCREENS AROUND THE SKYLIGHT.

Notice: This is a reproduction of a Wasco Products drawing and is supplied only for an authorized job. This drawing must not be used for construction or fabrication until signed as checked and issued for construction.