


Shrink-Out Smoke Vents

Gravity-Operated Automatic Drop-Out Skylight Smoke & Heat Vents

Economical Alternative to Mechanical Venting Units

Wasco's shrink-out smoke vents are gravity operated acrylic double domes designed to automatically shrink and fall out in the event of a fire.

- UL tested and approved
- Available with or without integral insulated curbs
- Available with 360° or 500° UL listed fusible links for specific control of venting allowing unit to be used with ESFR (early suppression fast response) sprinkler systems
- Roof Class 90psf Uplift
- Less expensive alternative to mechanical venting
- Optional safety screens available
- Area below the unit must be clear of obstructions which could impede the release of the domes.

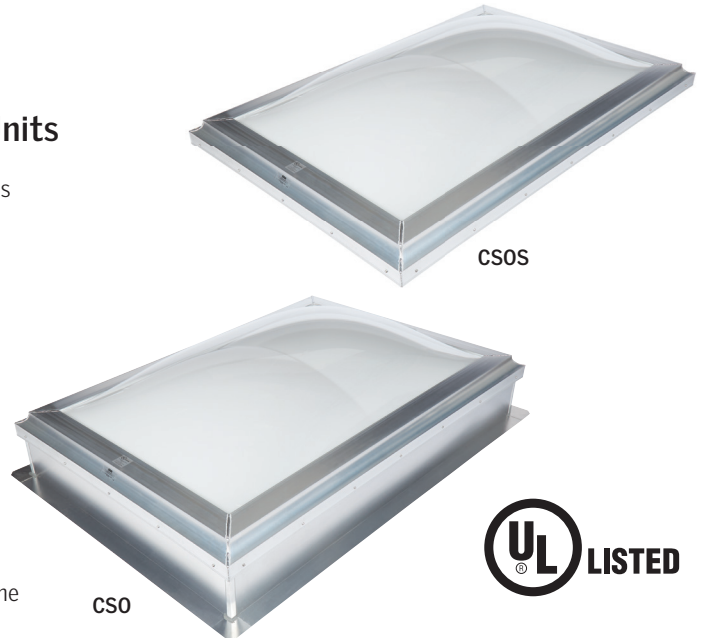


Standard Sizes:

Curb Mount (CSOS)

SIZE	O.D. OF CURB
5555	51" x 51"
5566	51" x 63"
5578	51" x 75"
5596	51" x 93"
55102	51" x 99"
6678	63" x 75"
6696	63" x 93"
66102	63" x 99"

Deck Mount (CSO)

SIZE	ROUGH OPENING
5555	48" x 48"
5566	48" x 60"
5578	48" x 72"
5596	48" x 90"
55102	48" x 96"
6678	60" x 72"
6696	60" x 90"
66102	60" x 96"

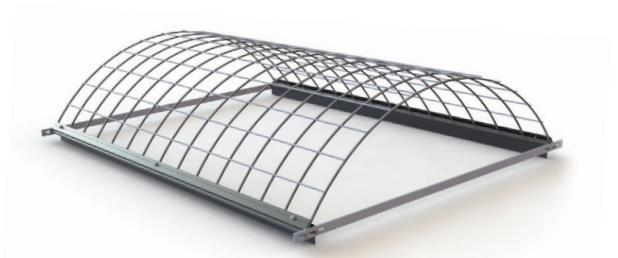

Exterior safety screens are available



Safety Considerations

Skylights pose an inherent risk of injury or death from fall throughs, and the safety of others is of the utmost importance to VELUX. VELUX recommends that the customer, building owner or manager use additional protection with the skylight such as an exterior or interior safety cage, to enhance long-term safety. The building owner or manager is responsible for providing fall protection around the skylight in accordance with OSHA regulations. VELUX also recommends that the building owner or manager restrict roof access only to personnel who have been cautioned as to the location of the skylights, and warned not to sit, step or walk on the skylights.